


datasheet



Specially for guided activities. Jumping impacts are absorbed by millions of micro air bubbles, which adapt to the foot, diminishing fatigue and injury risk.

- Aerobic: The ideal solution for group activity rooms (aerobic, step, cardio-boxing, etc.).
- Combi: The solution for multi-purpose group activity rooms, where heavy equipment is moved, such as indoor cycles.

COLOURS & REFERENCES

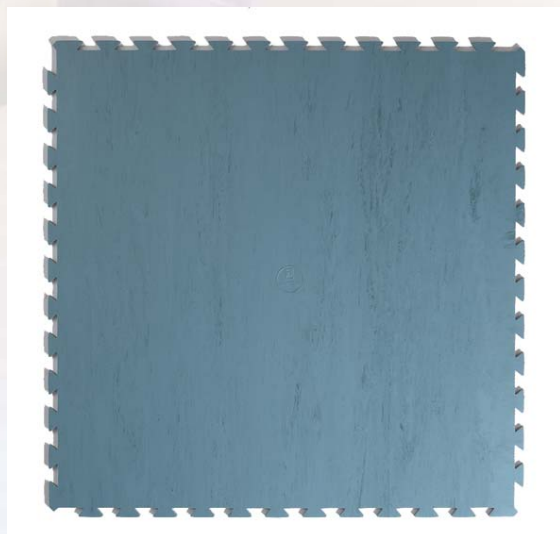

	AEROBIC	COMBI
WOOD COLOURS		
BAMBOO	112.021	113.021
BEECHWOOD	112.014	113.014
WALNUT	112.022	113.022
WENGUE	112.013	113.013
MAHOGANY	112.020	113.020
NATURAL COLOURS		
OCEAN BLUE	112.018	113.018
STONE GREY	112.019	113.019
WHITE MARBLE	112.023	113.023
BLACK MARBLE	112.024	113.024
ICE BLUE	112.025	113.025
GREEN AQUA	112.026	113.026
LAVA RED	112.027	113.027
SUNSET ORANGE	112.028	113.028
SOLID COLOURS		
BLUE	112.001	113.001
GREY	112.003	113.003
BLACK	112.011	113.011
RED	112.002	113.002
BEIGE	112.004	113.004

MAIN CHARACTERISTICS

	NORM	AEROBIC	COMBI
THICKNESS		9 mm 3/8"	12 mm 1/2"
NET DIMENSIONS		100 x 100 cm 39 3/8" x 39 3/8"	100 x 100 cm 39 3/8" x 39 3/8"
WEIGHT		2,7 kg 5,95 lb	3,6 kg 7,93 lb
DENSITY	UNE 53526	300 kg/m ³	300 kg/m ³
HARDNESS	DIN 53505	65° Shore A	65° Shore A
WATER ABSORPTION	ASTM D570	0%	0%
COEFFICIENT OF LINEAR DILATATION	0° C- 40° C	1.9 10 ⁻⁴ °C ⁻¹	1.9 10 ⁻⁴ °C ⁻¹
IMPACT ABSORPTION	EN 14808	45%	45%
FRICTION ESSAY	EN 13036	83	83
FIRE REACTION	EN 13501-1	Efl (Op. Cfl)	Efl (Op. Cfl)
FORMALDEHYDE EMISSION	EN 717-2	E1	E1

INSTALLATION SYSTEM

INTERLOCKING INSTALLATION SYSTEM

